




ProGrAnalog Corp.
09/21/2023

LoadSlammer Controller for Xilinx Versal ACAP FFEDs

Details

- Powered by a 24V barrel jack and connected by a Mini-B USB.
- Used for testing power delivery to Xilinx Versal devices.
- Plugs into XPOD for Xilinx FFED testing.
- XPOD connects to Xilinx FFED
- Voltage and current measurements are captured for every test taken.
- Both stimuli and measurements are generated and measured with this device.
- Realtime current is displayed on the GUI and via SMB situated on top of the device.
- GUI supports:
 - Automated test suites.
 - Automatic PDF Report generation.
 - Save, file share, and recall of waveforms.
 - Save, file share, and recall of workstations.

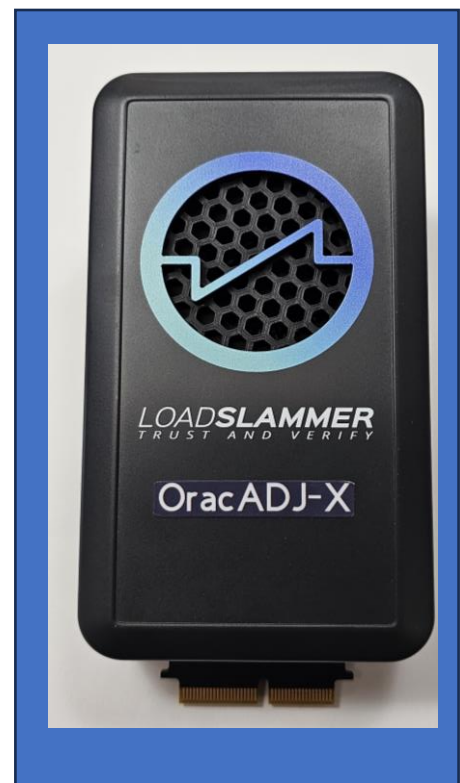

What is included in the LSP-Kit-OracADJ-X box:

- OracADJ-X Device
- 3ft USB-A to Mini USB-B Cable
- 24V AC Power Supply




Specifications

| Parameter | | Min | Typ. | Max | Unit |
|---|--|-----------------------------|--------|-----|----------|
| Timing Characteristics | | | | | |
| Rise Time | | 270 | | | ns |
| On Time Range | | 7.5 μ | | N/A | Sec |
| | | | | | |
| Load Characteristics | | | | | |
| Current Range* | | *Determined by FFED package | | | |
| Current Resolution* | | | | | |
| Current Output Accuracy | | | 5 | | % |
| Input Voltage Rating | | 0.6 | | 2.0 | V |
| Current Readout Accuracy | | | 5 | | % |
| | | | | | |
| Sampling System | | | | | |
| Sampling Rate | | | | 10 | MSPS |
| Bandwidth | | | 5 | | MHz |
| Capture Depth | | | 24,000 | | Points |
| Channel System | | 1 | | 5 | Channels |
| | | | | | |
| Device Connection | | | | | |
| <p>(1) LoadSlammer OracADJ-X will only work with XPOD and Xilinx FFED.</p> <p>(2) LoadSlammer OracADJ-X must only be used with an active Xilinx FFED that has a positive voltage.</p> <p>(3) The USB data connection is non-isolated, this effectively grounds the DUT's ground.</p> | | | | | |



FFED, OracADJ-X, POD System Block Diagram

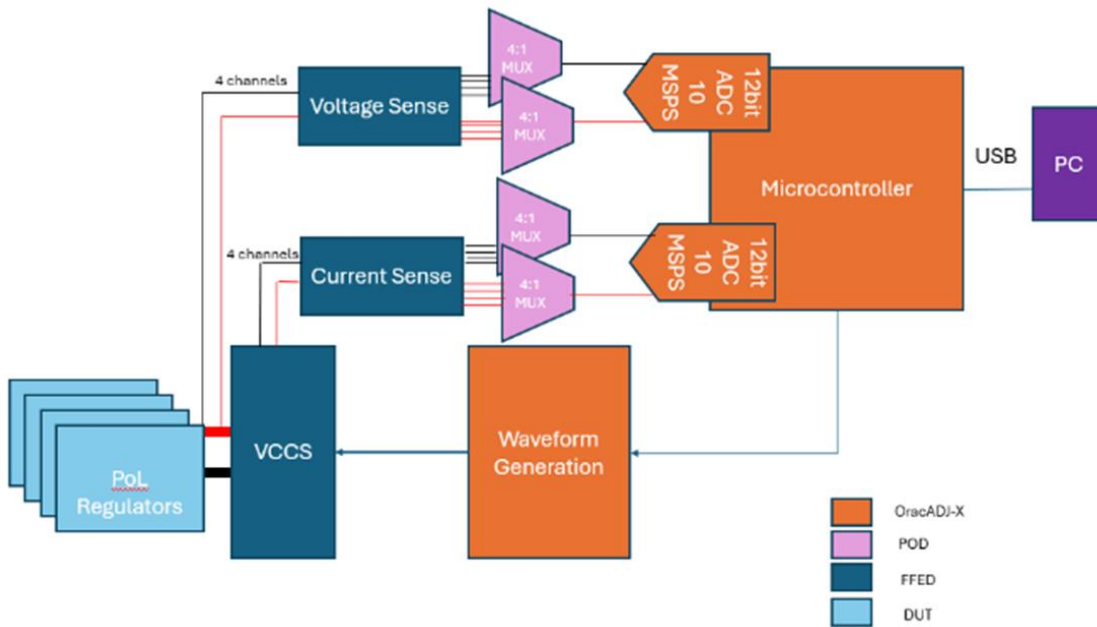

GUI

Transient - PWM and Frequency Sweep


Example VCCINT rail



GUI

Automation - Static & Dynamic Sweep Testing


example shows 4 static, 114 dynamic tests on VCCINT rail

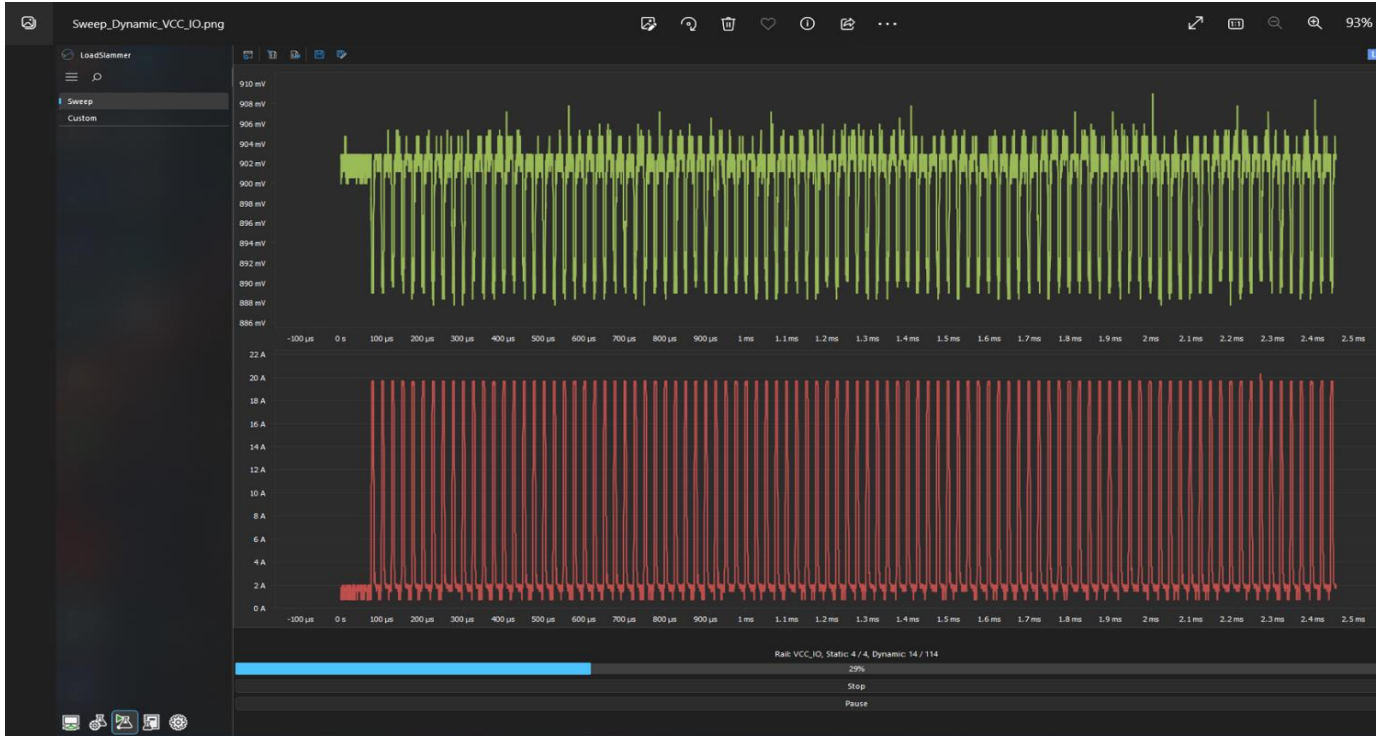

GUI

3D Sweep Results

Example VCCINT at 1.12V

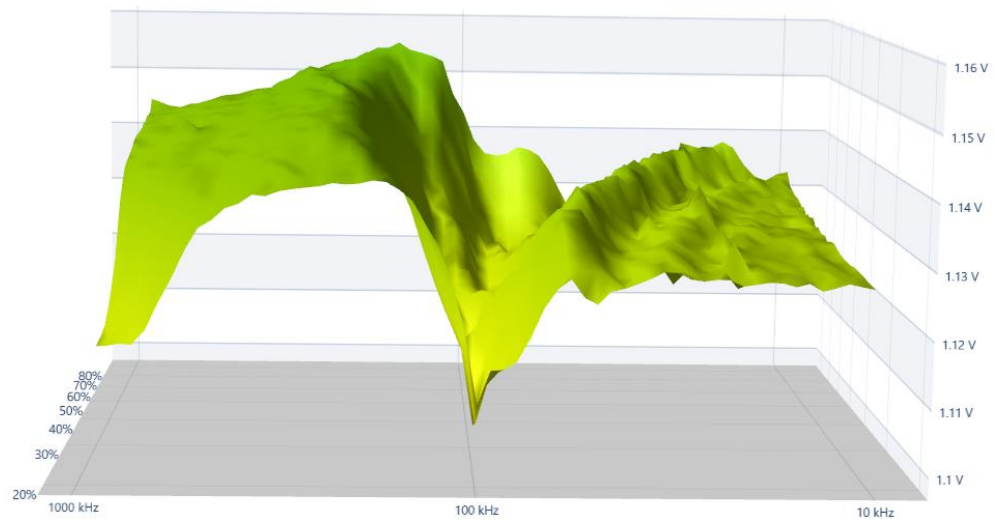

GUI

Automated – Report Generation



Summary Report: VC1902-FD - Group A

Summary

| | Pass | Borderline | Fail | Total |
|---------------|------|------------|------|-------|
| VCCINT | 118 | 0 | 0 | 118 |
| VCC_IO | 118 | 0 | 0 | 118 |
| VCC_SOC | 118 | 0 | 0 | 118 |
| VGTY_AVTT | 118 | 0 | 0 | 118 |
| Summary Total | 100% | 0% | 0% | 472 |

Report Created By: Roger
 Created On: 1/20/2023 4:58:12 PM
 Board Serial Number: DF4043H Bench: 01

GUI Version: 1.0.0.0 Windows Version: Microsoft Windows NT 10.0.22000.0

Controller: LSP_AD SN: LSP_AD-C56ACEED
 HW Revision Number: 0 Software Revision: 8/17/2022 8:40:44 PM

Adapter: 0
 Revision: 4

Test Settings

VCCINT

Tolerance Settings:

| Nominal | DC Range | Min AC | Max AC |
|------------------------|----------------|-------------------------------|--------|
| VID - (IDD * LL_SLOPE) | Nominal ± 0.02 | VID - (EDC * LL_SLOPE) - 0.11 | VID + |

Marginal Range for Max: 10 %

Marginal Range for Min: 10 %


Load Line Slope: 400 µΩ

Dynamic Load Settings:

EDC: 190 A
 Max Load Step: 190 A
 Max Load Release: 190 A
 Duration: 100 ms

Static Load Settings:

Min Current: 0 A
 Max Current: 190 A
 Step Current: 47.5 A
 Duration: 5 s

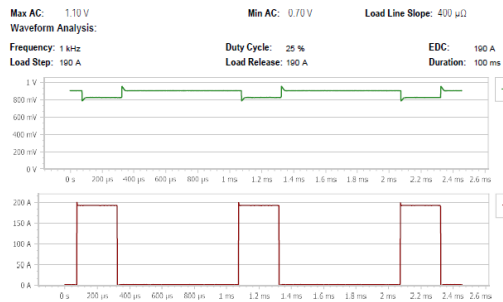


Dynamic Analysis:

Rail Name: VCCINT VID: 0 V Nominal Voltage: 0.90 V

Max AC: 1.10 V Min AC: 0.70 V Load Line Slope: 400 µΩ

| Frequency | Duty 75 % | | |
|-----------|-----------|----------|----------|
| | RMS | Min | Max |
| 1 kHz | 841.3 mV | 773.5 mV | 959.1 mV |
| 2 kHz | 841.8 mV | 774.1 mV | 959.7 mV |
| 3 kHz | 844.2 mV | 773.5 mV | 960.3 mV |
| 4 kHz | 843.6 mV | 773.5 mV | 960.9 mV |
| 5 kHz | 844.5 mV | 772.3 mV | 959.7 mV |
| 6 kHz | 844.4 mV | 771.1 mV | 960.9 mV |
| 7 kHz | 844.1 mV | 770.5 mV | 960.9 mV |
| 8 kHz | 844.8 mV | 770.5 mV | 960.9 mV |
| 9 kHz | 844.5 mV | 770.5 mV | 959.7 mV |
| 10 kHz | 844.7 mV | 770.5 mV | 959.7 mV |
| 20 kHz | 845.5 mV | 775.3 mV | 961.5 mV |
| 30 kHz | 846.4 mV | 775.9 mV | 959.7 mV |
| 40 kHz | 847.2 mV | 775.3 mV | 957.3 mV |
| 50 kHz | 848.4 mV | 775.9 mV | 955.4 mV |
| 60 kHz | 847.4 mV | 775.3 mV | 951.9 mV |
| 70 kHz | 847.8 mV | 775.3 mV | 951.8 mV |

Dynamic Analysis:

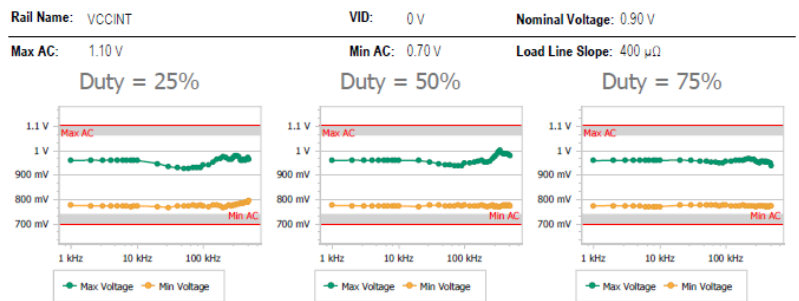

Availability

| Mouser part number | ProGrAnalog part number |
|----------------------|-------------------------|
| 124-LSP-KITORACADJ-X | LSP-Kit-OracADJ-X |

Visit us at:

<https://loadslammer.com>

Questions:

support@progranalog.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ProGrAnalog Corp:](#)

[LSP-Kit-OracADJ-X](#)